



300Mbps

Wireless N VoIP VDSL/ADSL Modem Router


TD-VG5612

Highlights

- **Fast Broadband Speeds** – Up to 100Mbps broadband speeds, ideal for smooth streaming media and online gaming
- **Cost-Effective VoIP** – Supports up to eight VoIP accounts and numerous call features, keeping phone costs low
- **Versatile USB Sharing** – USB 2.0 port for shared storage, media, and voicemail
- **EWAN Connection** – Available LAN/WAN port offers broadband connectivity option for cable modem and fiber equipment
- **Easy Setup** – Easy Setup Assistant with multi-language support provides quick & hassle-free installation



300Mbps
2.4GHz



USB 2.0
Port



Voice Mail



EWAN
Connection




3G
Connection



WPS



6000V Lightning
Protection



Parental
Control



Wireless
On/Off

Features

Speed

- **Fast Broadband Speed** – Features superfast broadband speeds of up to 100Mbps downstream and upstream
- **300Mbps Wireless Speeds** – Delivers Wi-Fi speeds of up to 300Mbps, ideal for online gaming, Internet calls and even the HD video streaming

VoIP

- **Cost-Effective VoIP** – Supports up to eight VoIP accounts keeping phone costs low
- **Various Call Features** – Such as caller ID, call waiting, call holding, call forwarding, 3-way conference calls and voicemail

Uses

- **DSL Port** – For VDSL2/VDSL/ADSL2+/ADSL2/ADSL connections
- **EWAN Connection** – Allows for fiber or cable access as backup connections
- **USB 2.0 Port** – For shared storage, media, and voicemail, also supports 3G USB dongle connection
- **WPS** – Easy one-touch WPA wireless security encryption with the WPS button


Easy Sharing

- **USB 2.0 Port for Fast Sharing** – With one USB 2.0 port, you can access and share your files and media locally and with networked devices remotely
- **Built-in Media Server** – Allows users to play music, video and view photos

Security

- **Parental Control** – Allows parents or administrators to establish access policies for children or staff
- **SPI and NAT Firewall** – Protects end-user devices from potential attacks from the Internet

Diagram

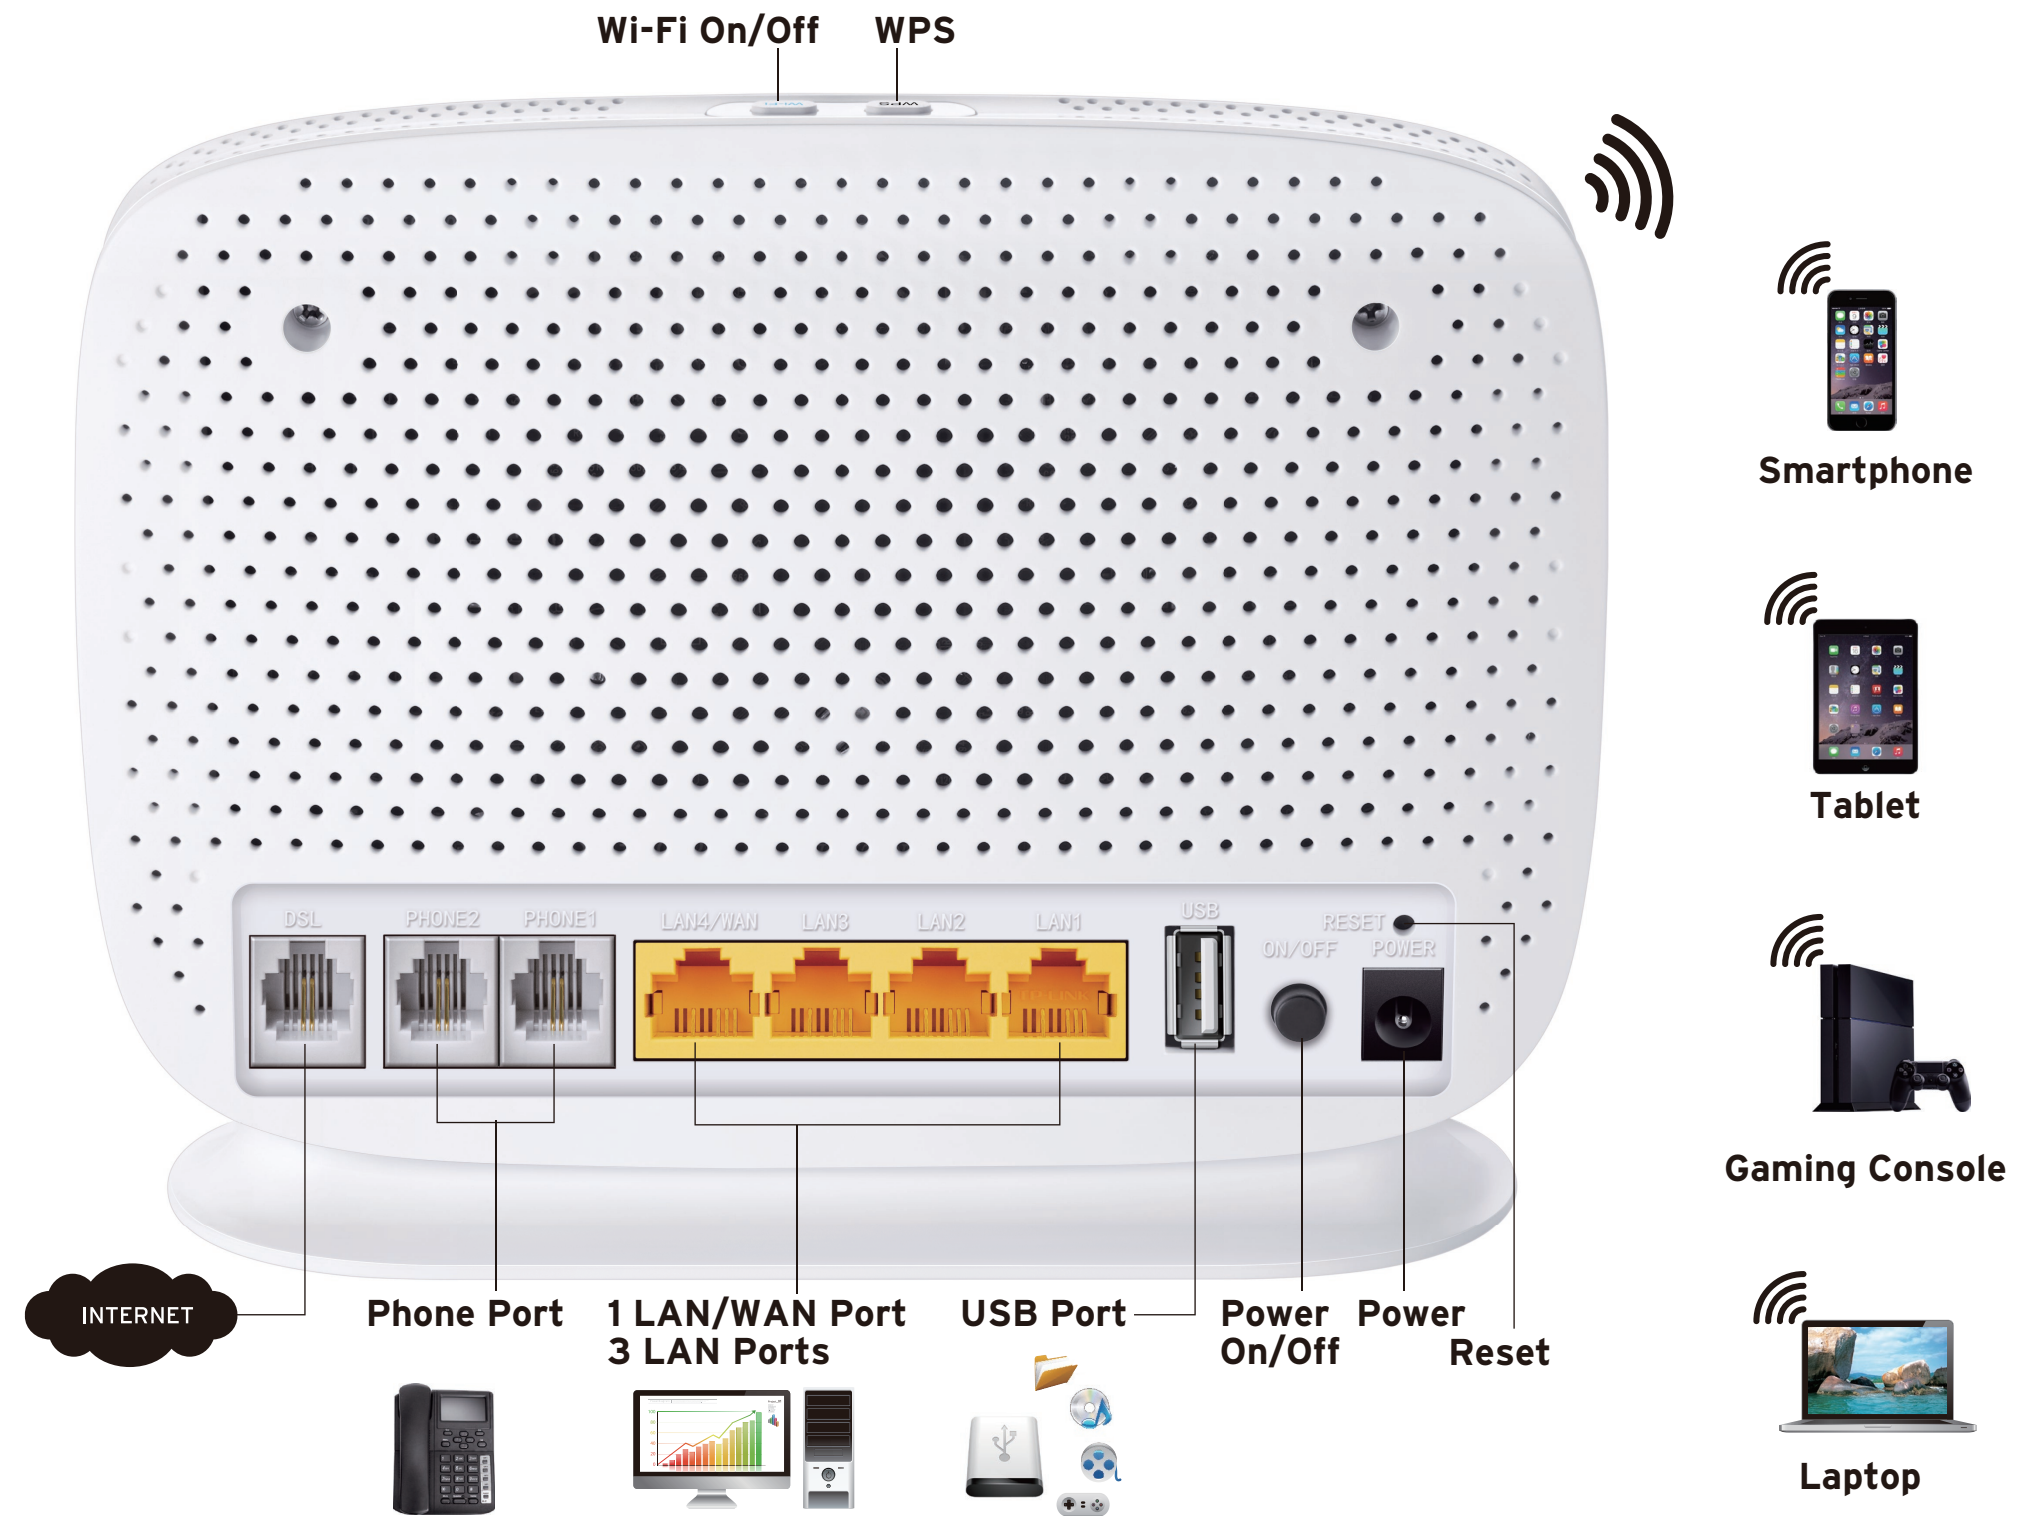

Specifications

Hardware

- **Ethernet Ports:** 3 10/100Mbps RJ45 LAN Ports, 1 10/100Mbps RJ45 LAN/WAN Port, 1 RJ11 Port
- **USB Ports:** 1 USB 2.0 Port
- **Button:** WPS Button, Wi-Fi On/Off Button, Power On/Off Button, Reset Button
- **External Power Supply:** 12VDC/1.5A
- **Dimensions (W x D x H):** 6.9 x 2.4 x 5.1 in. (174 x 60 x 130 mm)
- **IEEE Standards:** IEEE 802.3, IEEE 802.3u
- **VDSL2 Standards:** ITU G.993.2
- **ADSL2+ Standards:** ITU-T G.992.5
- **ADSL2 Standards:** ITU-T G.992.3 (G.DMT.bis), ITU-T G.992.4 (G.lite.bis)
- **ADSL Standards:** Full-rate ANSI T1.413 Issue 2, ITU-T G.992.1(G.DMT), ITU-T G.992.2(G.Lite), ITU-T G.994.1 (G.hs), ITU-T G.995.1
- **Antenna Type:** Omni directional, Internal, Printed Antenna
- **Antenna Gain:** 2 x 2.6dBi

Wireless

- **Wireless Standards:** IEEE 802.11b/g/n 2.4GHz
- **Frequency:** 2.400-2.4835GHz
- **Signal Rate:** 300Mbps at 2.4GHz
- **Transmit Power:** <20dBm(EIRP)
- **Wireless Security:** 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA-PSK2 encryptions, Wireless MAC Filtering

Software

- **Operation Modes:** VDSL/ADSL Modem Router, Wireless Router
- **Quality of Service:** WMM, Bandwidth Control (IP QoS)
- **Port Forwarding:** Virtual Server, Port Triggering, DMZ, UPnP, Manage Control
- **VPN Passthrough:** PPTP, L2TP, IPSec Passthrough
- **ATM/PPP Protocols:** ATM Forum UNI3.1/4.0, PPP over ATM (RFC 2364), PPP over Ethernet (RFC2516), IPoA (RFC1577/2225), PVC - Up to 8 PVCs
- **Security:** NAT Firewall, SPI Firewall, MAC / IP / URL Filtering
- **Advanced Functions:** Parental Control, Traffic Shaping(ATM QoS) UBR, CBR, VBR-rt, VBR-nrt, Dynamic Host Configuration Protocol (DHCP), DHCP relay, Network Address Translation (NAT), PVC/Ethernet Port Grouping Static Routing, RIP v1/v2 (optional), DNS Relay, DDNS
- **USB Sharing:** Storage Sharing/FTP Server/Media Server, 3G Modem
- **Management:** Web Based Configuration(HTTP), Remote management, Telnet management, Command Line Interface, SSL for TR-069, SNMP v1/2c Web Based Firmware Upgrade, CWMP(TR-069), Diagnostic Tools
- **Protocols:** Supports IPv4 and IPv6
- **VOIP Features:** Two RJ-11 FXS ports for connecting to regular telephones Call hold, Call transfer, Call internal transfer, Call forward, Warm call, Do not disturb, Anonymous call, Call restriction, Speed dial, etc. USB Voicemail, Caller ID, 3-party conference, SIP account – up to 8 accounts

Specifications

Others

Package Contents

- 300Mbps Wireless N VoIP VDSL/ADSL Modem Router TD-VG5612
- External Splitter
- RJ-11 Telephone Cable
- RJ-45 Ethernet Cable
- Telephony Feature Guide
- Quick Installation Guide
- Resource CD
- Power Adapter

Certification

- RCM, RoHS

Environment

- Operating Temperature: 0°C ~40°C (32°F ~104°F)
- Storage Temperature: -40°C ~70°C (-40°F ~158°F)
- Operating Humidity: 10%~90% non-condensing
- Storage Humidity: 5%~90% non-condensing



For more information, please visit

<http://www.tp-link.com/en/products/details/?categoryid=&model=TD-VG5612>

or scan the QR code left

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies CO., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies CO., Ltd.

Maximum wireless speed of up to 300Mbps is the theoretical data rate derived from IEEE standard 802.11 specifications. Actual data throughput and wireless coverage will vary due to network conditions and environmental factors including volume of network traffic, building materials and construction, network overhead, actual data throughput rate, and wireless coverage. TP-LINK makes no express or implied representations or warranties about this product's compatibility with any future standards.

www.tp-link.com

Others

Ideal to use with



- 300Mbps Wireless N USB Adapter TL-WN821N



- 300Mbps High Gain Wireless USB Adapter TL-WN822N